

# 6"

# Self Priming TS-150

# DPS PUMPS

### MAXIMUM SOLIDS 3"

### 6" TS-150 Pump Data


Impeller Dia.	314 mm	292 mm	280 mm	314 mm
Nominal Duty	70 l/sec at 24 m	70 l/sec at 24 m	70 l/sec at 20 m	70 l/sec at 21 m
Max. Volume	100 l/sec	100 l/sec	90 l/sec	100 l/sec
Max. Head	34 mtrs	34 mtrs	30 mtrs	30 mtrs
Max. Suction	8.4 mtrs	8.6 mtrs	7.5 mtrs	8.4 mtrs
Pump Speed	1550 rpm	1750 rpm	1750 rpm	1480 rpm
NOL Power	33 kW	31 kW	26 kW	30 kW



### Self Priming Lifts (314 mm Imp. Dia.)

RPM	950	1150	1350	1450	1550
Metres	4.2	6.4	6.7	7.0	7.6

- \* external shimless adjustment
- \* solids handling impeller
- \* oil lubricated mechanical seal
- \* removable front coverplate
- \* removable BPO pedestal assembly
- \* oil lubricated bearings

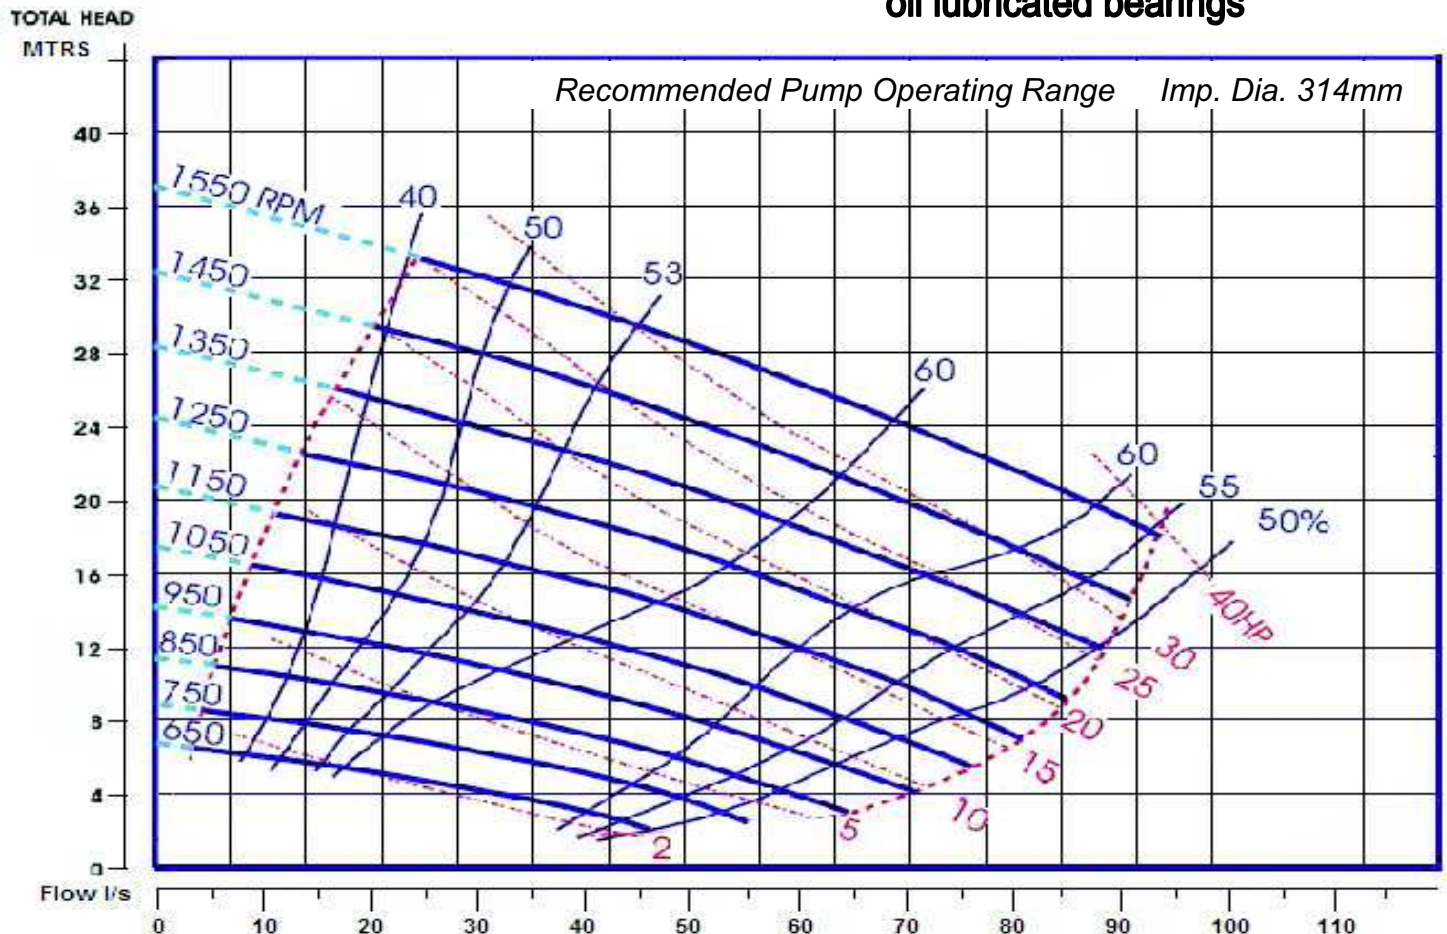

Approx Weight: 394 KG