

# 6" H

## Self Priming TS-150H High head

# DPS PUMPS

### MAXIMUM SOLIDS 1-1/4"

### 6" TS-150H Pump Data

<b>Impeller Dia.</b>	318 mm	305 mm	292 mm	318 mm
<b>Nominal Duty</b>	70 l/sec at 50 m	70 l/sec at 45 m	70 l/sec at 41 m	70 l/sec at 24 m
<b>Max. Volume</b>	100 l/sec	100 l/sec	100 l/sec	100 l/sec
<b>Max. Head</b>	58 mtrs	53 mtrs	49 mtrs	33 mtrs
<b>Max. Suction</b>	8.8 mtrs	8.7 mtrs	8.7 mtrs	8.7 mtrs
<b>Pump Speed</b>	1950 rpm	1950 rpm	1950 rpm	1470 rpm
<b>NOL Power</b>	60 kW	56 kW	52 kW	30 kW




### Self Priming Lifts (318 mm Imp. Dia.)

<b>RPM</b>	<b>1450</b>	<b>1750</b>	<b>1950</b>
<b>Metres</b>	4.3	4.6	4.6

- \* external shimless adjustment
- \* solids handling impeller
- \* oil lubricated mechanical seal
- \* removable front coverplate
- \* removable BPO pedestal assembly
- \* oil lubricated bearings



TOTAL HEAD  
MTRS

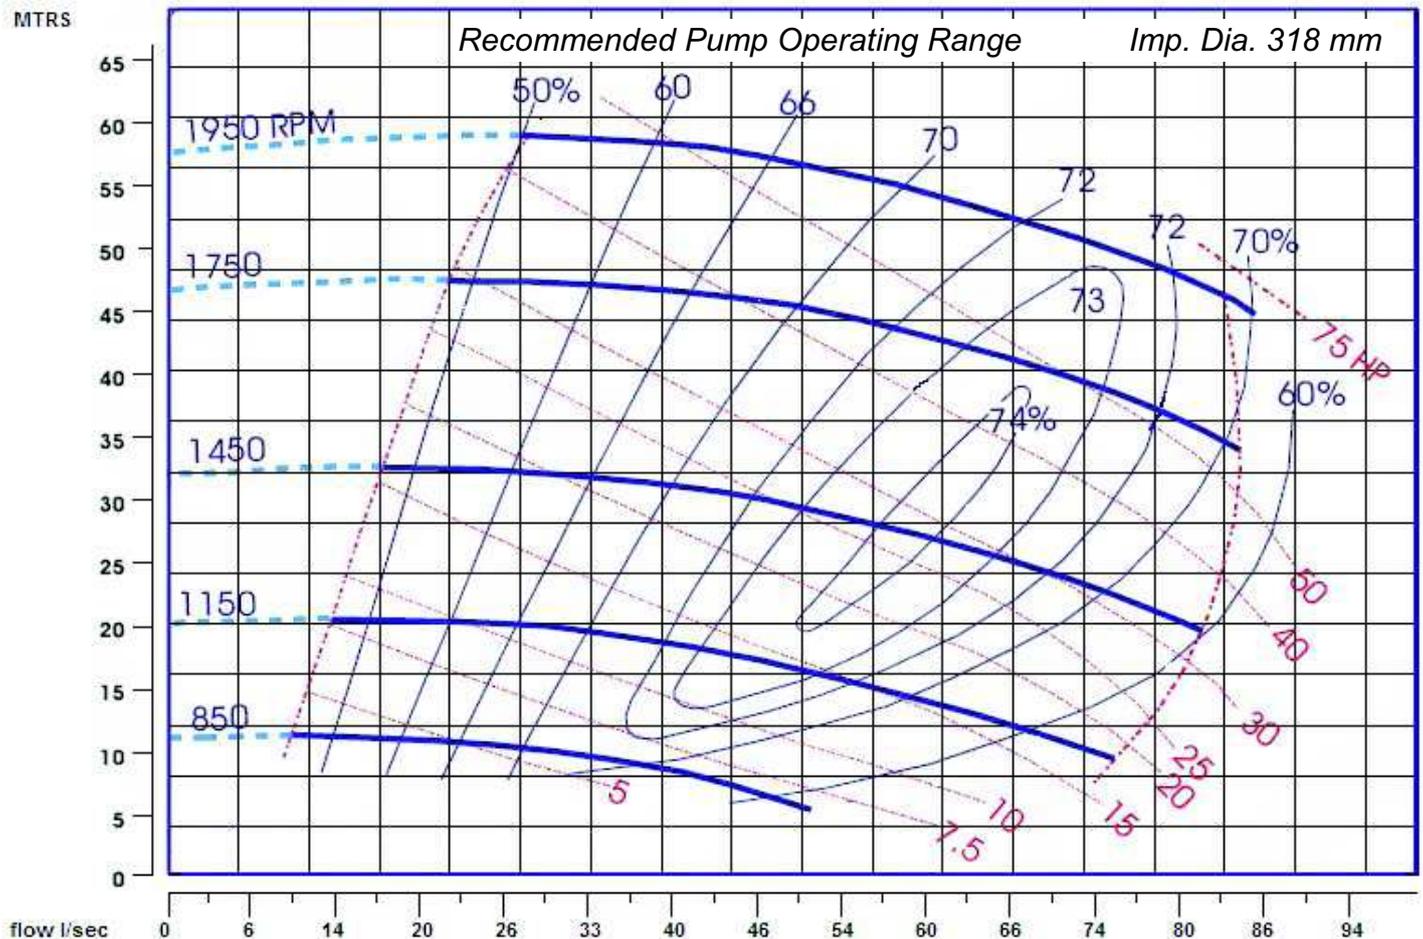

Approx Weight: 417 KG