

6" H

Self Priming TS-150H High head

DPS PUMPS

MAXIMUM SOLIDS 1-1/4"

6" TS-150H Pump Data

Impeller Dia.	318 mm	305 mm	292 mm	318 mm
Nominal Duty	70 l/sec at 50 m	70 l/sec at 45 m	70 l/sec at 41 m	70 l/sec at 24 m
Max. Volume	100 l/sec	100 l/sec	100 l/sec	100 l/sec
Max. Head	58 mtrs	53 mtrs	49 mtrs	33 mtrs
Max. Suction	8.8 mtrs	8.7 mtrs	8.7 mtrs	8.7 mtrs
Pump Speed	1950 rpm	1950 rpm	1950 rpm	1470 rpm
NOL Power	60 kW	56 kW	52 kW	30 kW




Self Priming Lifts (318 mm Imp. Dia.)

RPM	1450	1750	1950
Metres	4.3	4.6	4.6

- * external shimless adjustment
- * solids handling impeller
- * oil lubricated mechanical seal
- * removable front coverplate
- * removable BPO pedestal assembly
- * oil lubricated bearings



TOTAL HEAD
MTRS

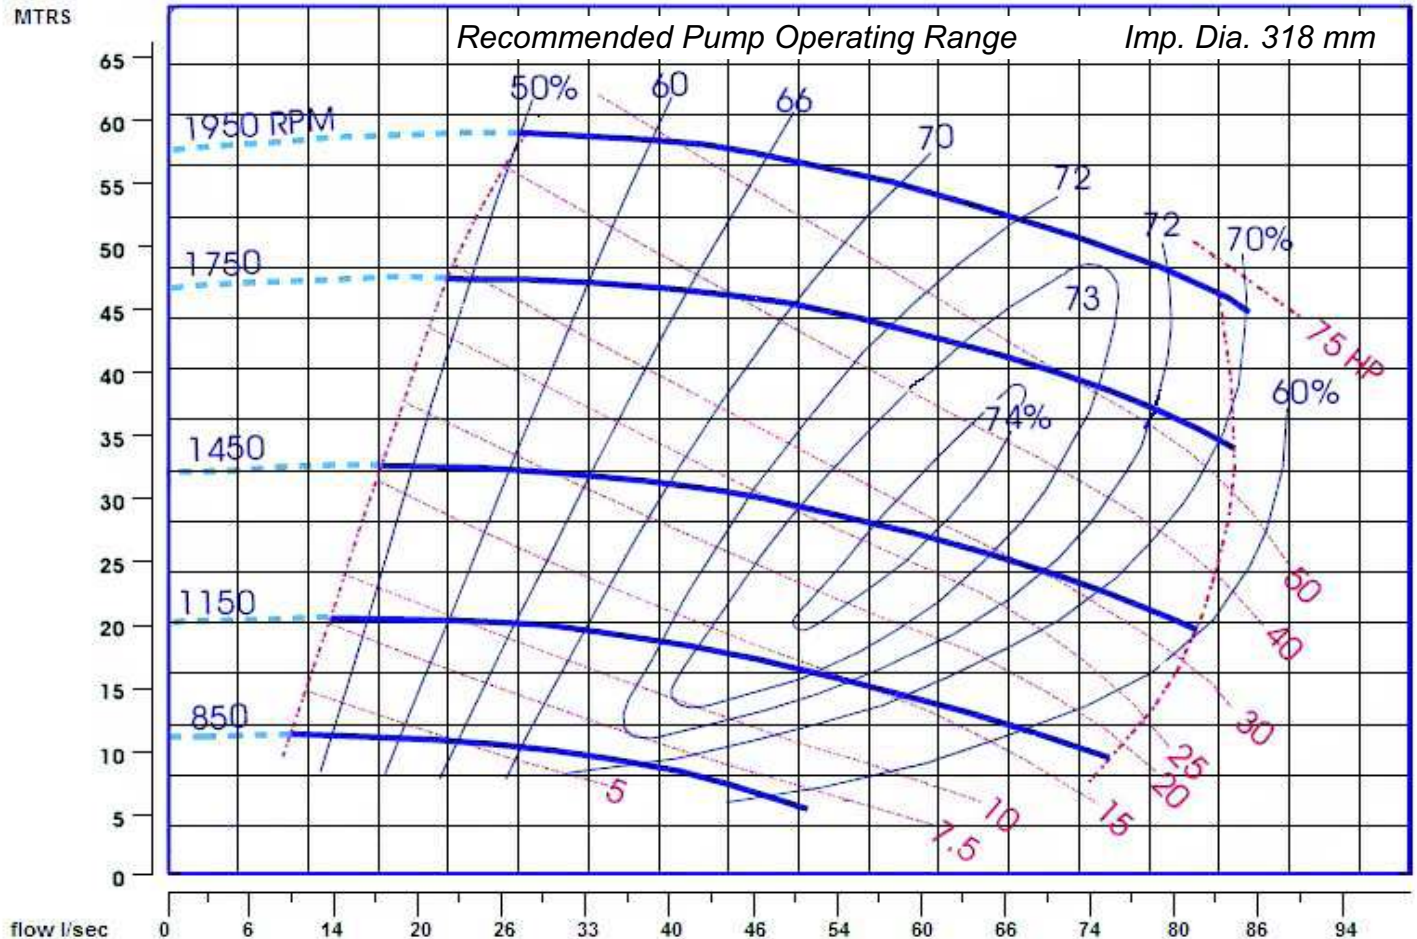

Approx Weight: 417 KG