


# Powering Australia

## DIESEL POWER PACKS

CLEAN ▶ COMPACT ▶ READY TO INSTALL

If you could  
see into  
the future  
you'd know  
You've made the  
RIGHT CHOICE

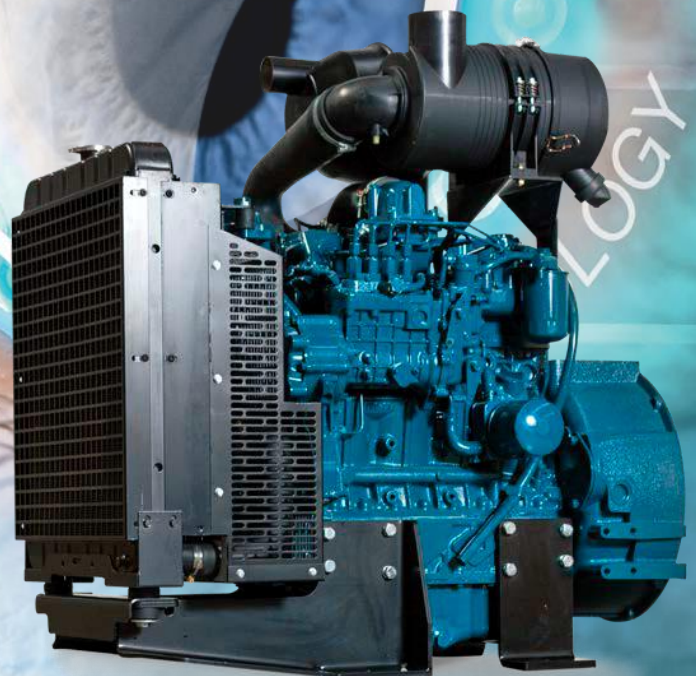

**DIESEL PARTS & SERVICE**

Phone: 07 3640 9400

[info@dieselparts.com.au](mailto:info@dieselparts.com.au)

[www.dieselparts.com.au](http://www.dieselparts.com.au)

**Kubota**<sup>®</sup>  
Power Equipment

# GENERAL SPECIFICATIONS



For speed/hp continuous ratings contact us or visit [www.diselparts.com.au](http://www.diselparts.com.au)

Model	D905	D1105	V1505	V2203	V2403	V2403T	V3300	V3300T	V3800	V3800T
<b>Cooling Type</b>	Liquid	Liquid	Liquid	Liquid	Liquid	Liquid	Liquid	Liquid	Liquid	Liquid
<b>Cylinders</b>	3	3	4	4	4	4	4	4	4	4
<b>Bore mm</b>	72	78	78	87	87	87	98	98	100	100
<b>Stroke mm</b>	73.6	78.4	78.4	92.4	102.4	102.4	110	110	120	120
<b>Displacement Litres/cc</b>	.9	1.1	1.5	2.2	2.4	2.4	3.3	3.3	3.8	3.8
<b>Aspiration</b>	Naturally aspirated	Naturally aspirated	Naturally aspirated	Naturally aspirated	Naturally aspirated	Turbo charged	Naturally aspirated	Turbo charged	Naturally aspirated	Turbo charged
<b>Rated Speed</b>	3000	3000	3000	2800	2700	2700	2600	2600	2600	2600
<b>Output hp Intermittent</b>	20.0	25.0	33.5	46.0	47	55.3	68.0	83.0	78.8	95.7
<b>Output hp Continuous</b>	17.0	22.0	29.0	40.0	40.1	48.0	59.1	72.1	68.5	82.5
<b>Bellhousing Flywheel</b>	SAE 5 SAE 6.5	SAE 5 SAE 6.5	SAE 5 SAE 6.5	SAE 4 SAE 7.5	SAE 4 SAE 7.5	SAE 4 SAE 10	SAE 4 SAE 10	SAE 4 SAE 10	SAE 3 SAE 11.5	SAE 3 SAE 11.5
<b>MaxTorque Nm/speed</b>	53 2600	69.7 2200	94.6 2200	141.6 1700	153.7 1600	159.4 1800	228.1 1400	275.4 1400	264.9 1500	318.3 1500
<b>Starter 12V</b>	1.0kW	1.0kW	1.2kW	1.4kW	1.4kW	2.0kW	2.5kW	2.5kW	2.5kW	2.5kW
<b>Alternator</b>	12V 30A	12V 30A	12V 40A	12V 45A	12V 40A	12V 40A	12V 45A	12V 60A	12V 60A	12V 60A
<b>Weight kg</b>	180	180	180	255	250	275	375	370	385	410


## POWER PACK INCLUSIONS

Engine	<input checked="" type="checkbox"/>	Fuel filter	<input checked="" type="checkbox"/>
Radiator with guards	<input checked="" type="checkbox"/>	Engine feet	<input checked="" type="checkbox"/>
Coolant tank	<input checked="" type="checkbox"/>	Temperature switch	<input checked="" type="checkbox"/>
Air cleaner	<input checked="" type="checkbox"/>	Solenoid	<input checked="" type="checkbox"/>
Muffler kit	<input checked="" type="checkbox"/>	Throttle control	<input checked="" type="checkbox"/>

Fully Assembled

## OUR OPTIONS

Shutdown Panels
Stub Shafts
Hydraulic Pump Adaptors
PTO Clutches
Flywheel Plates

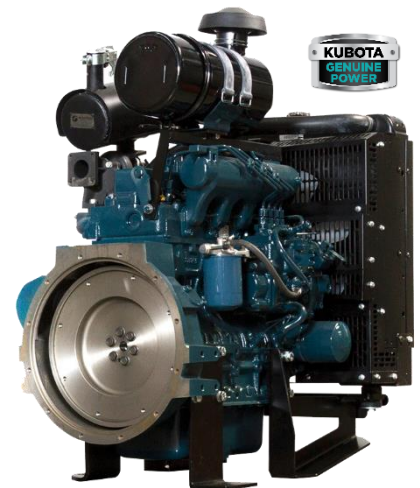

Power Packs by Kubota

- Fuel Efficient
- Low Noise
- High Power
- Compact Design
- Cost effective
- 2 year/2000-hour Factory Warranty

**Kubota**  
Power Equipment

# CONTINUOUS HORSEPOWER RATINGS



Model	1500	1800	2000	2200	2400	2600	2800	3000	3200	3400	3600
Z482	-	5.6	6.2	6.8	7.4	8.0	8.7	9.3	9.7	10.3	10.8
Z602	-	6.7	7.5	8.4	9.1	9.8	10.5	11.2	11.8	12.6	13.5
D722	-	8.4	9.3	10.3	11.2	12.1	13.0	13.8	14.7	15.5	16.3
D902	-	10.0	11.3	12.5	13.8	14.8	16.0	17.0	17.7	19.1	20.4
D905	8.9	10.5	11.7	12.9	14.0	15.1	16.0	17.0	-	-	-
D1105	11.4	13.6	15.0	16.5	17.9	19.2	20.6	22.0	-	-	-
D1105T	-	16.3	18.2	20.3	22.2	24.0	25.9	27.7	-	-	-
V1505	13.9	17.9	19.9	21.8	23.6	25.3	27.1	29.0	-	-	-
V1505T	18.7	22.5	25.0	27.4	29.7	32.0	34.1	36.5	-	-	-
D1403	14.3	16.9	18.5	20.1	21.7	23.3	25.0	-	-	-	-
D1503	16.4	18.8	21.3	22.5	23.7	25.0	25.3	-	-	-	-
D1703	17.2	20.2	22.3	24.3	26.2	28.1	30.0	-	-	-	-
D1803	19.7	23.3	25.4	27.0	28.7	30.3	30.9	-	-	-	-
V1903	19.5	23.0	25.3	27.5	29.7	31.8	34.0	-	-	-	-
V2203	23.0	27.1	29.7	32.4	35.0	37.5	40.0	-	-	-	-
V2003T	27.5	32.5	36.2	39.7	42.9	45.9	48.6	-	-	-	-
V2403	27.0	31.9	35.2	36.9	38.5	39.6	2700/40.1	-	-	-	-
V2403T	27.8	33.6	36.9	41.0	44.2	46.7	2700/48.0	-	-	-	-
V3300	36.5	43.4	47.5	51.8	55.6	59.1	-	-	-	-	-
V3300T	44.5	52.6	57.8	63.0	67.5	72.1	-	-	-	-	-
V3800	40.0	48.0	54.0	58.0	64.0	68.5	-	-	-	-	-
V3800T	52.5	62.0	67.0	72.5	77.5	82.5	-	-	-	-	-

## DIESEL PARTS & SERVICE

Phone: 07 3640 9400  
[info@dieselparts.com.au](mailto:info@dieselparts.com.au)  
[www.dieselparts.com.au](http://www.dieselparts.com.au)

**Kubota**<sup>®</sup>  
**Power Equipment**